#### Premium quality for wet wear and build-up


## **REMALINE 35**



Our high-quality **REMALINE** lining offers optimum surface protection for your machines and equipment. You avoid unnecessary costs for maintenance and downtime, thereby increasing the productivity of your equipment many times over.

#### Application areas

**REMALINE 35** features excellent resistance to wet abrasive and sharp particles. The properties of **REMALINE 35** make it the optimum rubber lining for sand and gravel industry equipment as well as in the glass industry. **REMALINE 35** lining has also proven valuable with sticky material such as loam and clay.

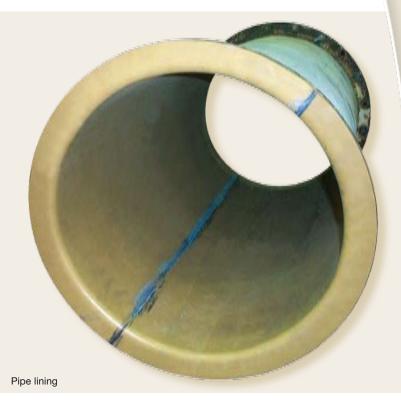



#### Typical fields of use

- Pipe lining
- Pumps
- Slides, gutters and aprons
- Loader bucket lining to prevent build-up
- Outlet hoses for ready-mix concrete

#### Advantages

- Build-up elimination
- Less noise in your equipment
- Easy and fast installation
- Technical consultation and data available anytime
- ► Increases the efficiency of your equipment



### Premium quality for wet wear and build-up

# **REMALINE 35**



#### **Technical properties**

Product characteristics	REMALINE 35 is a material with extraordinarily high elasticity and stretching properties, consisting of 95 % natural rubber.  CN bonding layer: REMALINE 35 comes equipped with a CN bonding layer which affords the product an extremely good adhesive quality in combination with the REMA TIP TOP adhesive systems.	
Storage stability	Max. 24 months  ► At 25 °C ± 2 °C with no loss in quality.  Subject to DIN regulation 7716.	
Color		yellow
Polymer	DIN ISO 1629	NR
Specific weight	DIN EN ISO 1183	0,96 g/cm <sup>3</sup>
Hardness	ISO 868-2003 (DIN 53505)	34 ± 5 Shore A
Abrasion at 5 N	DIN ISO 4649-2006	110 mm³
Resilience elasticity	ISO 4462-1986 (DIN 53512)	78 %
Available sizes*	Standard thickness in mm	3 - 25
	Standard width in mm	1 500 or 2 000

<sup>\*</sup>Other dimensions available on request.

**REMALINE 35** is also available with fabric reinforcement.

REMA TIP TOP GmbH Business Unit Industrie

Gruber Strasse 63 Phone: Fax: www.rema-tiptop.com 85586 Poing/Germany +49 8121 707-234 +49 8121 707-222 info@tiptop.de Your local contact:

