

REMACLEAN HM-U10

Conveyor Belt Cleaning System with Elastically Mounted Carbide Blades and a Spindle Clamping Device

The **REMACLEAN HM-U10** cleaning system is suitable for speeds of up to 6.5 m/s. Thanks to the individually movable tungsten carbide blades, optimum adaptation to the conveyor belt surface and thus effective cleaning that is gentle on the conveyor belt is guaranteed.


BELT CLEANING SYSTEM

REMACLEAN – U-Serie – for Belt Return Side Applications

REMACLEAN HM-U10


Benefits

- Optimal adjustment to the conveyor belt surface
- Long service life due to the use of highly wear-resistant carbide
- Easy adjustment of contact pressure by means of spindle clamping device
- For belt widths from 400 – 2,200 mm

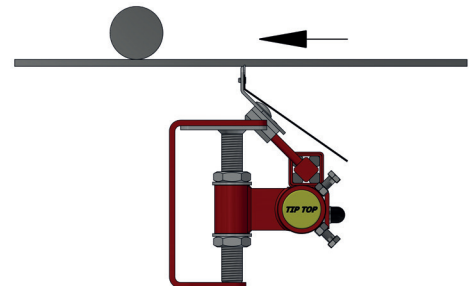

Technical Data

| Belt Width [mm] | A [mm] | B [mm] | C [mm] | D [mm] | Number of Carbide Blades |
|--------------------|-----------|---------------|-----------|-----------|-----------------------------|
| 400 | 360 | 460 – 1,250 | 1,400 | 51 | 3 |
| 500 | 480 | 560 – 1,350 | 1,500 | | 4 |
| 650 | 600 | 680 – 1,500 | 1,650 | | 5 |
| 800 | 720 | 800 – 1,600 | 1,750 | 60,3 | 6 |
| 1,000 | 960 | 1,040 – 1,850 | 2,000 | | 8 |
| 1,200 | 1,080 | 1,160 – 2,050 | 2,200 | 76,1 | 9 |
| 1,400 | 1,200 | 1,280 – 2,250 | 2,400 | | 10 |
| 1,600 | 1,440 | 1,520 – 2,950 | 3,000 | 101,6 | 12 |
| 1,800 | 1,680 | 1,760 – 3,150 | 3,300 | | 14 |
| 2,000 | 1,800 | 1,880 – 3,350 | 3,600 | | 15 |
| 2,200 | 2,040 | 2,020 – 3,600 | 3,750 | | 17 |

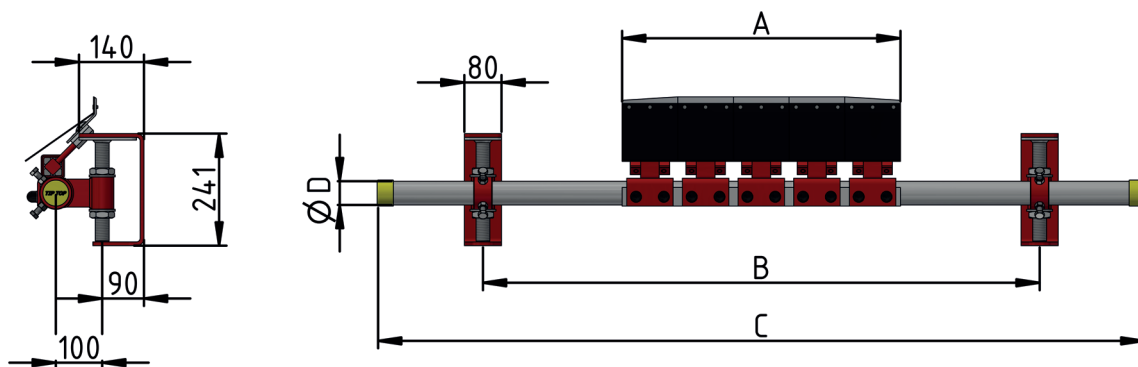

REMA TIP TOP AG
 Gruber Strasse 65 · 85586 Poing / Germany
 Phone: +49 8121 707-100
 Fax: +49 8121 707-10 222
 info@tiptop.de
www.rema-tiptop.com

Your local partner