



// ONE BRAND // ONE SOURCE // ONE SYSTEM



// SERVICE // MATERIAL PROCESSING // SURFACE PROTECTION // AUTOMOTIVE

REMATRACK TTX

Trough Tracker

REMATRACK tracking units provide continuous guiding and support to correct any belt misalignment. REMATRACK ensures the conveyor belt runs central, prevents damages to the belt and completes conveyor system.

REMATRACK will increase plant availability and productivity through less downtime whilst offering improved safety to your workforce.

REMATRACK TTX

Trough Tracker - Standard Polyurethane Lagging

Properties

- Automatic dynamic self-adjusting
- Light duty robust design
- High-quality polyurethane lagging with high wear-resisting property
- F.R.A.S. polyurethane lagging available
- LYC Deep ball bearings configuration available
- Available from 450mm - 1600mm

Typical field of use

- REMATRACK are suited for all systems with belt tracking issues
- Operate in all conditions, quick activation on both wet and dry conveyor system

Benefit

- Maintenance free
- Individual rollers for easy replacement
- One step casting polyurethane lagging ensure longer services life

REMATRACK TTX

Ref. No.	Part No.	Designation	Belt Width
651 7050	TTX500	REMATRACK TTX500	450-500 mm
651 7065	TTX650	REMATRACK TTX650	600-650 mm
651 7080	TTX800	REMATRACK TTX800	750-800 mm
651 7090	TTX900	REMATRACK TTX900	900 mm
651 7100	TTX1000	REMATRACK TTX1000	1000-1050 mm
651 7120	TTX1200	REMATRACK TTX1200	1200 mm
651 7140	TTX1400	REMATRACK TTX1400S	1350-1400 mm



// ONE BRAND // ONE SOURCE // ONE SYSTEM


- // SERVICE
- // MATERIAL PROCESSING
- // SURFACE PROTECTION
- // AUTOMOTIVE



REMA TIP TOP AG
Gruber Strasse 65 · 85586 Poing / Germany

REMA TIP TOP Asia
REMA TIP TOP Singapore Pte Ltd
380 Jalan Besar #08-02/03 ARC380 / Singapore

www.rema-tiptop.asia

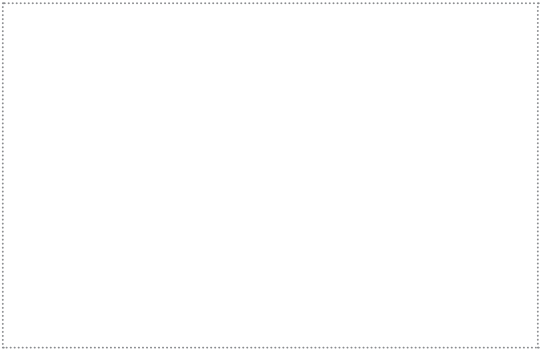

Your local contact